

# **PRODUCT SPECIFICATION**



# Part No. : JH-9RGB14G45-F2A-PM High Power LED

Catalog	
1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8





# **1.Product Features**

- High Brightness RGB LED
  - Round Package
- Viewing Angle 140 Degree
- Transparent Silicone

#### 2.Dimensions

- Chip Material: InGaN AlGaInP
- RoHS Compliant

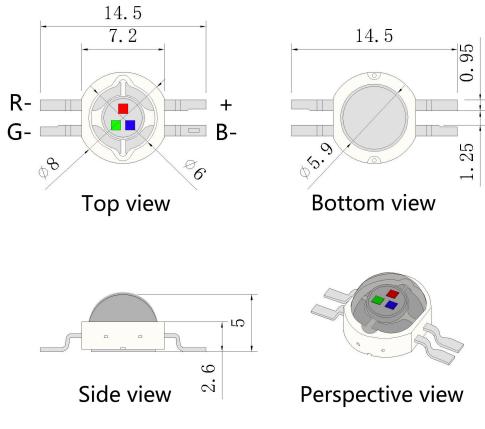

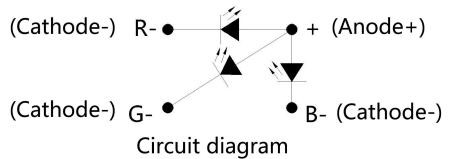

#### Notes:

1. All dimensions are in millimeters.

2. Tolerance is  $\pm 0.1$ mm unless otherwise noted.



# **3**.Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit	
Continuous Forward Current	IF	700	mA	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	1000	mA	
Reverse Voltage	VR	5	V	
Power Dissipation	PD	3	W	
Electrostatic Discharge	ESD	1000	V	
Operating Temperature Range	TOPR	-25°C to +80°C		
Storage Temperature Range	TSTG	-35°C to +100°C		
Lead Soldering Temperature	TSOL	260°C		

# 4.Optical Character @ Ta=25° C


Parameter	Symbol	Color	Min.	Тур.	Max.	Unit	Test Condition
Forward Voltage V	VF	R	2.2	2.4	2.6	V	I <sub>F</sub> =700mA
		G	3.2	3.4	3.6	V	I <sub>F</sub> =700mA
		В	3.2	3.4	3.6	V	I <sub>F</sub> =700mA
		R	100	110	120	Lm	I <sub>F</sub> =700mA
Luminous Flux Φ	G	160	170	180	Lm	I <sub>F</sub> =700mA	
	В	40	50	60	Lm	I <sub>F</sub> =700mA	
Dominant Wavelength Wld	R	620	622.5	625	nm	I <sub>F</sub> =700mA	
	G	520	522.5	525	nm	I <sub>F</sub> =700mA	
		В	460	462.5	465	nm	I <sub>F</sub> =700mA
Reverse Current	IR				10	μA	V <sub>R</sub> =5V
Viewing Angle	201/2				140	deg	I <sub>F</sub> =700mA
Recommend Forward Current	IF(rec)	RGB			700	mA	


#### Notes:


Measurement tolerance of forward voltage  $\pm 0.1V$ 




## **5.** Optical Character Curves




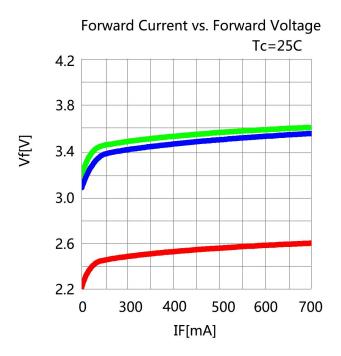

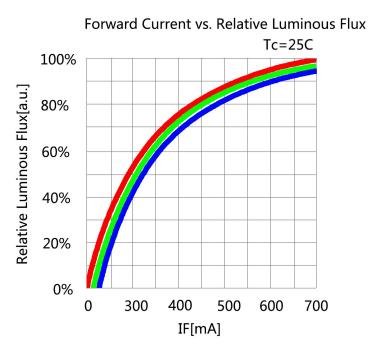

Case Temperature vs. Relative Luminous Flux

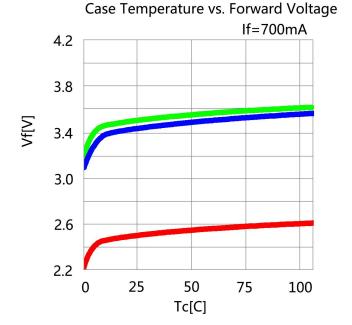





4/8



### 6. Spectrum Curves

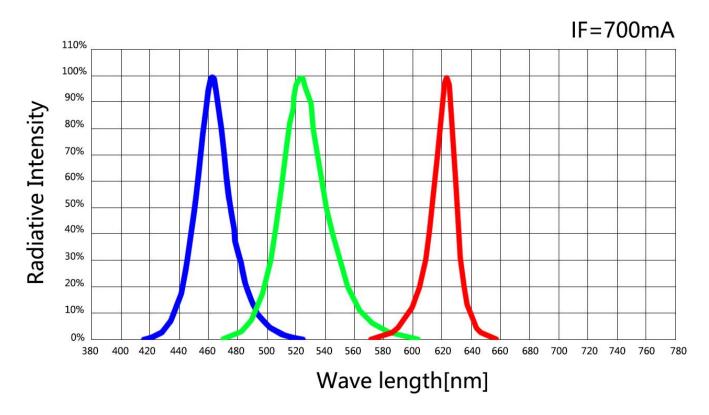


## 7. Viewing Angle Curves

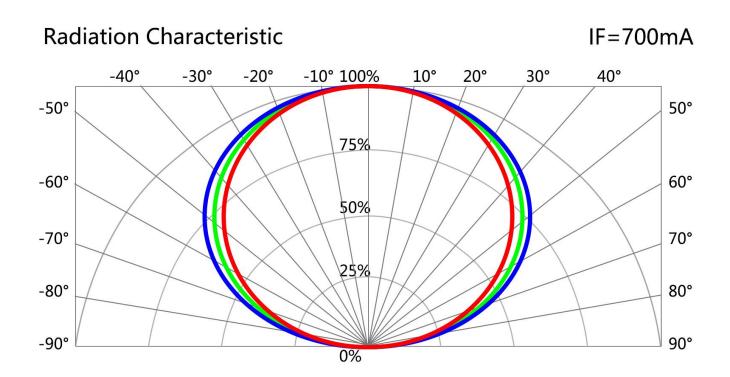



#### 8.Tape&Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at 25°C±3°C, humidity 50-60%. If unpacked above 1week, bake at 60±5°C for 10-12 hours before weld.

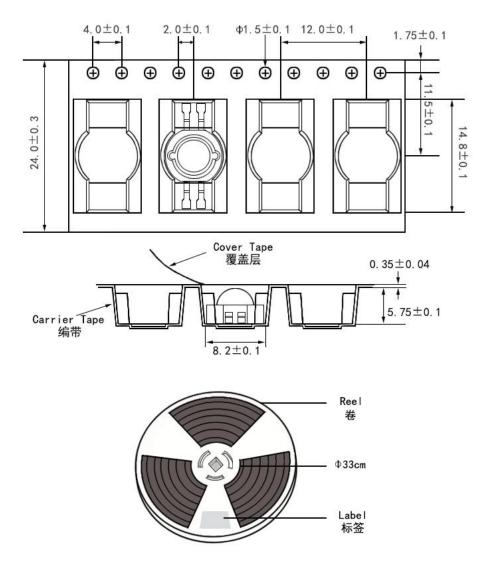


#### Notes:

- 1. QTY: 1000pcs/Reel
- 2. Tolerance ±0.2mm.
- 3. Package: P/N



#### **9.**Soldering Advice

1. When soldering,don't touch the LED appearance gel during,this bad operation will destroy the LED.Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

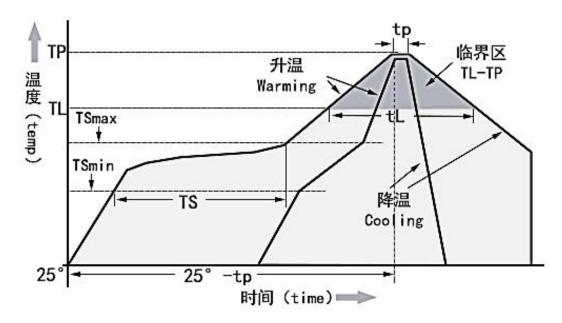

Temperature Curve Character	Lead-free solder			
Average heating rate(TSmin to Tp)	最高 3℃/秒			
	Top 3 ℃ / s			
Preheating: Minimum temperature ( TSmin )	90°C			
Preheating: Maximum temperature ( TSmax)	200°C			
Preheating: Time ( TSmin to TSmax)	60-180 s			
Duration above temperature: Temperature TL	240°C			
Duration above temperature: Time tL	60-150 s			
Peak/classification temperature (Tp)	260°C			
Time within 5°C of actual peak temperature (tp)	20-40 s			
	最高 6℃/秒			
Cooling speed	The highest 6 $^\circ C$ / s			
	最多8分钟			
Time to reach peak temperature at 25°C	8 minutes Max			



#### **10.**Cautions

#### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)

#### 2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B. The best working temperature range of the product is 40-60°. It is recommended to control

the working temperature of the product within a reasonable range.

# PASS Solution of the series o

#### **3. Installation Conditions**

A、Do not exert any pressure on the LED area during the use of the led beads. If the machine is

used to take materials, select a suction nozzle of reasonable size, such as below:



