

PRODUCT SPECIFICATION



Part No. : JH-3535IRRY12ZC14-T9A-590-850
High Power LED


Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8


1.Product Features

- High Brightness IR/R/Y LED Round Package
- Viewing Angle 120 Degree
- Transparent Silicone
- Chip Material: IngaN AlGaInP
- RoHS Compliant


2.Dimensions

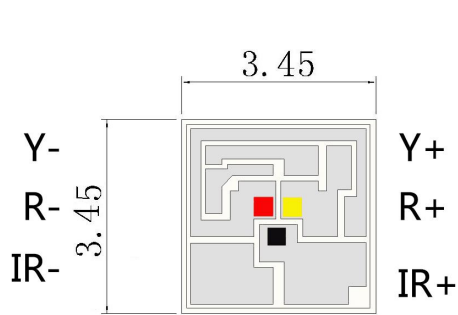


Top view

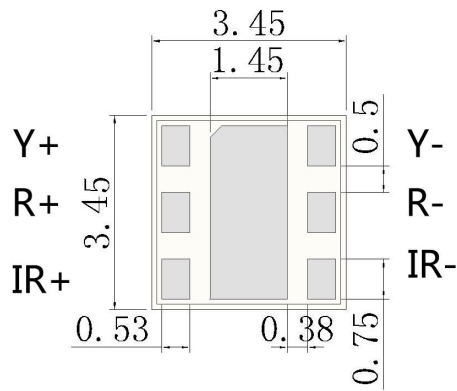

Bottom view



Side view

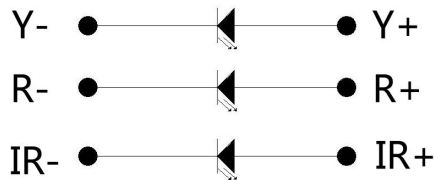

(Cathode-) (Anode+) Circuit diagram

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	50	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	70	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	0.03	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

4. Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	IR	1.4	1.6	1.8	V	I _F =50mA
		R	2.0	2.2	2.4	V	I _F =50mA
		Y	2.0	2.2	2.4	V	I _F =50mA
Luminous Flux	Φ	R	6	8	10	Lm	I _F =50mA
Power Dissipation		Y	6	8	10	Lm	I _F =50mA
		PO	IR	15	18	20	mW
Dominant Wavelength	Wld/Wlp	IR	845	850	855	nm	I _F =50mA
		R	620	623	625	nm	I _F =50mA
		Y	590	593	595	nm	I _F =50mA
Reverse Current	IR				10	μA	V _R =5V
Viewing Angle	2θ1/2				120	deg	I _F =50mA
Recommend Forward Current	IF(rec)	IRRY			50	mA	


Notes:

Measurement tolerance of forward voltage ±0.1V


5. Optical Character Curves

(25 ° Ambient Temperature Unless Otherwise Noted)


Forward Current vs. Forward Voltage
Tc=25C

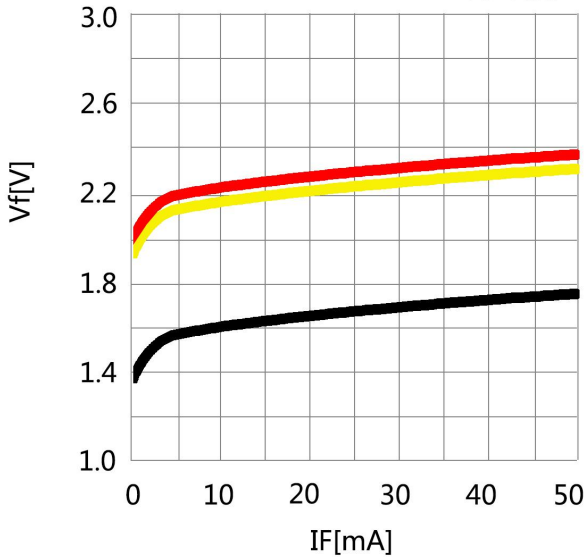


Forward Current vs. Relative Luminous Flux
Tc=25C

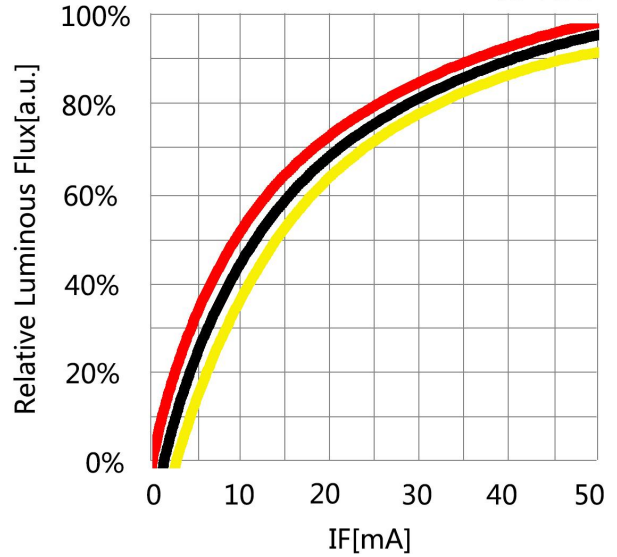


Temperature vs. Forward Voltage

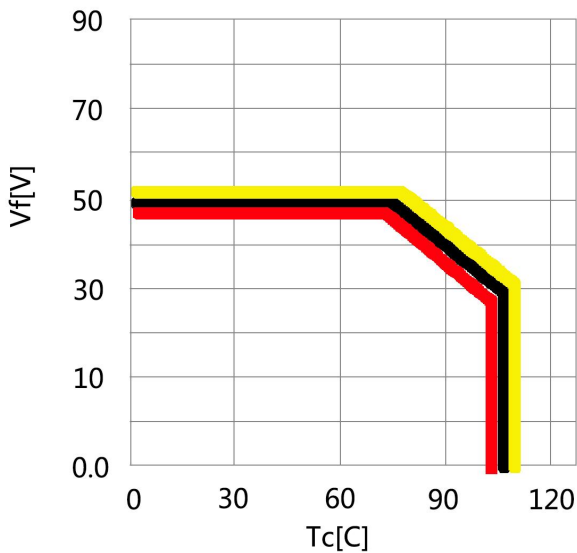

Temperature vs. Relative Luminous Flux
If=50mA

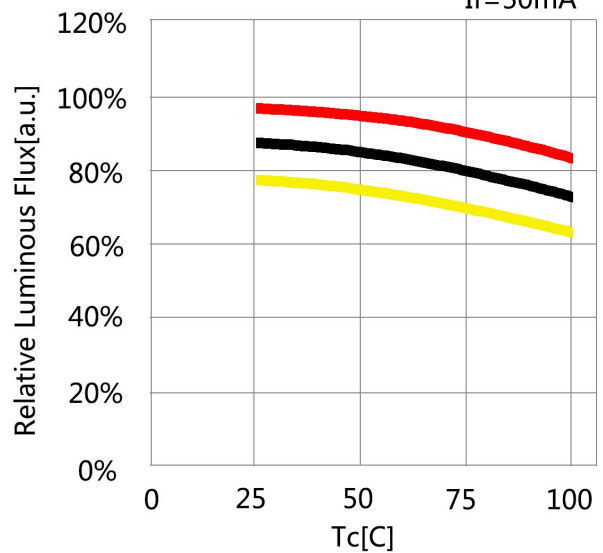


6. Spectrum Curves

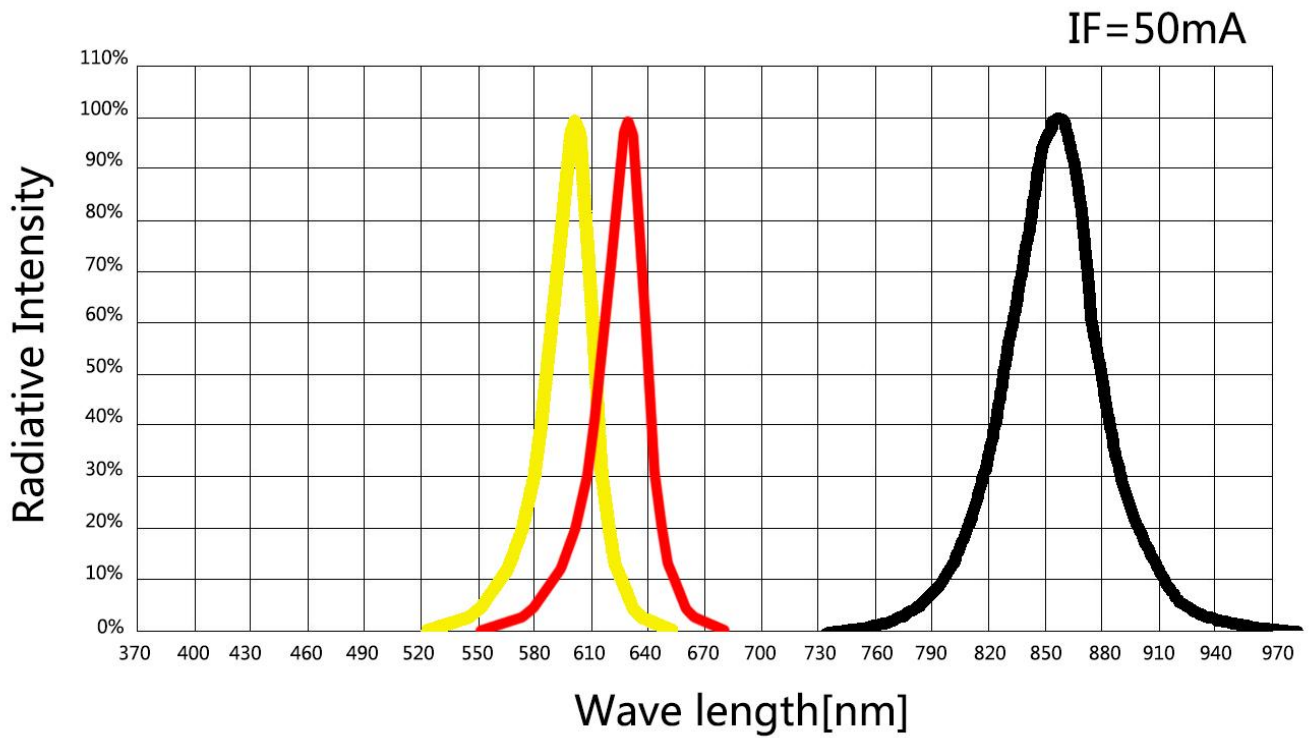

7. Viewing Angle Curves


Radiation Characteristic

IF=50mA

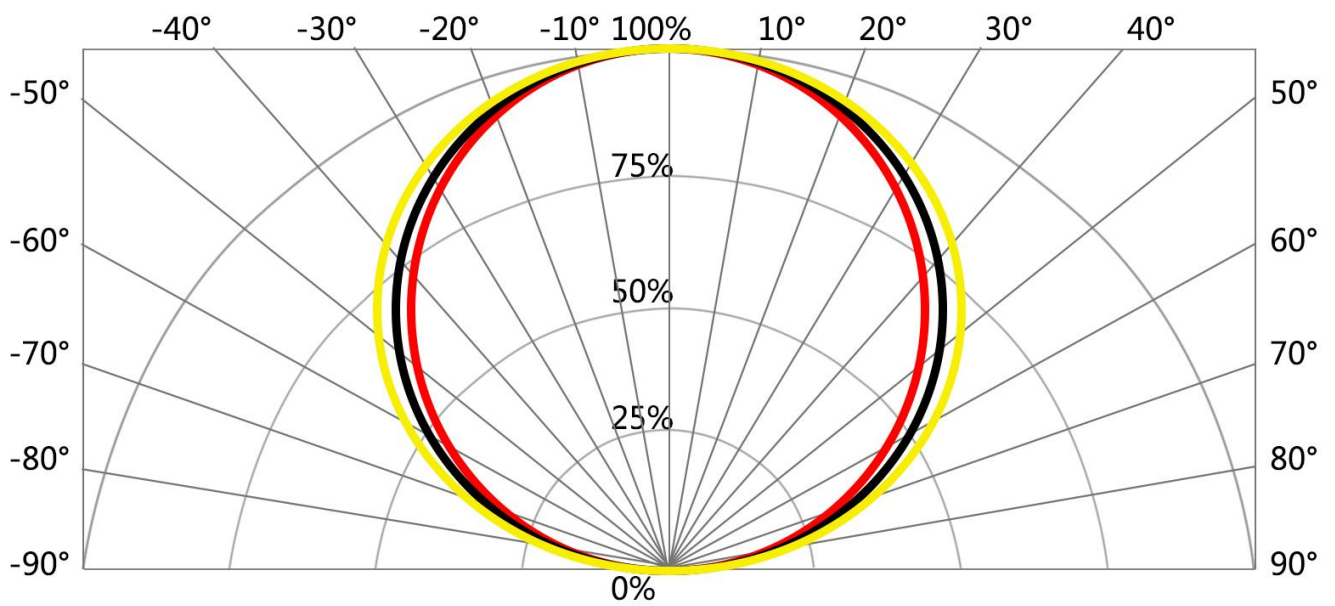

8. Tape & Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at 25°C ± 3°C, humidity 50-60%. If unpacked above 1 week, bake at 60 ± 5°C for 10-12 hours before weld.

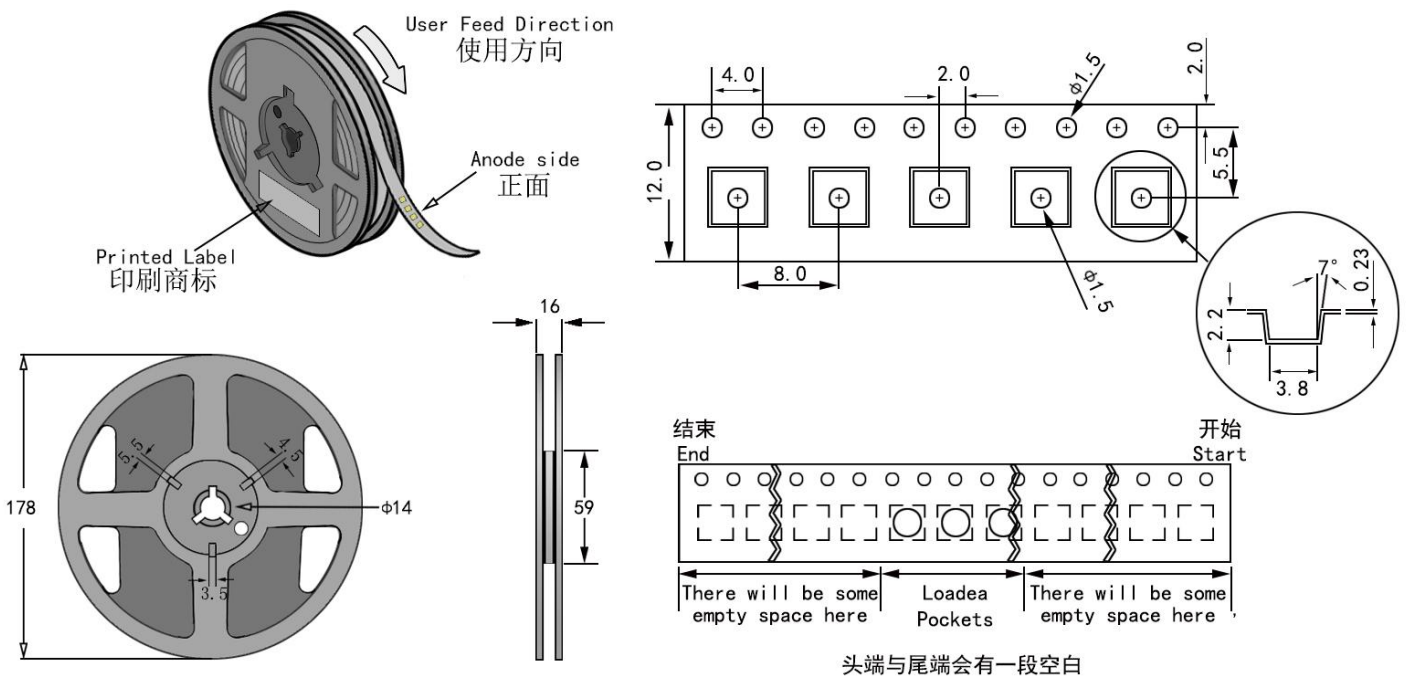


Notes:

1. QTY: 1000pcs/Reel
2. Tolerance ±0.2mm.
3. Package: P/N

9.Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

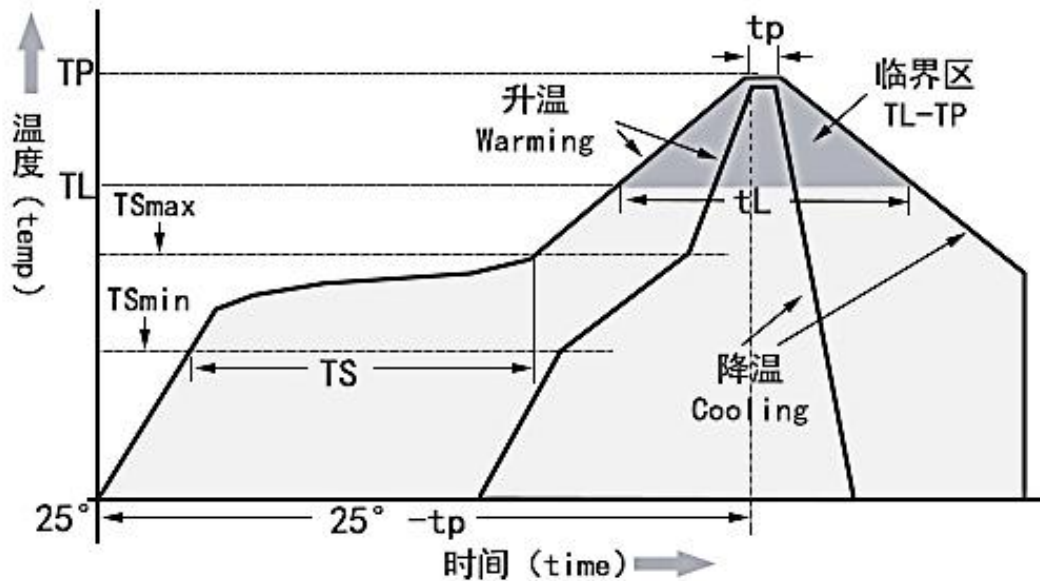

Temperature Curve Character	Lead-free solder
Average heating rate(TSmin to Tp)	最高 3°C/秒 Top 3 °C / s
Preheating: Minimum temperature (TSmin)	90°C
Preheating: Maximum temperature (TSmax)	200°C
Preheating: Time (TSmin to TSmax)	60-180 s
Duration above temperature: Temperature TL	240°C
Duration above temperature: Time tL	60-150 s
Peak/classification temperature (Tp)	260°C
Time within 5°C of actual peak temperature (tp)	20-40 s
Cooling speed	最高 6°C/秒 The highest 6 °C / s
Time to reach peak temperature at 25°C	最多 8 分钟 8 minutes Max

10. Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

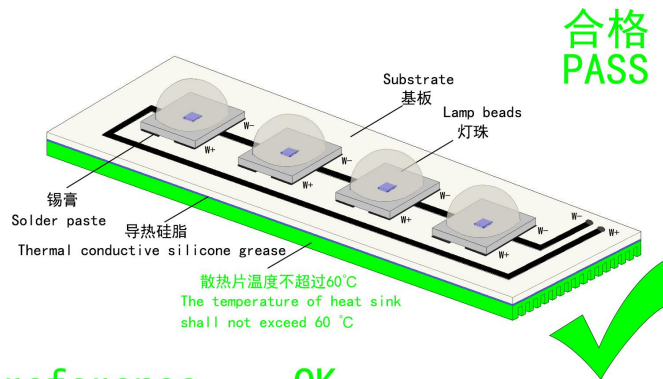

3. Installation Conditions

reference OK

- A、 Do not exert any pressure on the LED area during the use of the led beads. If the machine is used to take materials, select a suction nozzle of reasonable size, such as below:

