


# **PRODUCT SPECIFICATION**



## Part No.: JH-5050RGBW12G45-T8A-457.5 High Power LED

Catalog	
1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8




## **1.Product Features**

- High Brightness RGBW LED
  - Plane Package
- Viewing Angle 120 Degree
- Transparent Silicone

#### 2.Dimensions

- Chip Material: IngaN AlGaInP
- RoHS Compliant

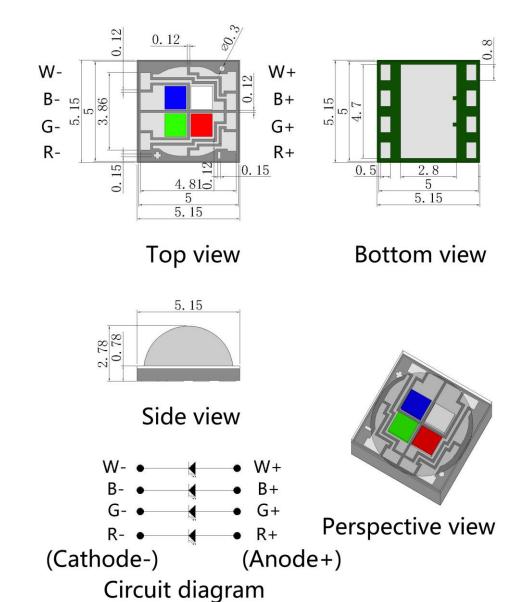

#### Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerance is  $\pm 0.1$ mm unless otherwise noted.



## 3.Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	700	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	1000	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	12	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

## 4.Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Тур.	Max.	Unit	Test Condition
Forward Voltage	VF	W	2.8	2.9	3.0	V	I⊧=700mA
		B/G	2.8	2.9	3.0	V	I <sub>F</sub> =700mA
		R	2.0	2.1	2.2	V	I <sub>F</sub> =700mA
		W	240	250	260	Lm	I <sub>F</sub> =700mA
Luminous flux	Luminous flux Φ	B/G	40/200	50/210	60/220	Lm	I <sub>F</sub> =700mA
		R	80	90	100	Lm	I <sub>F</sub> =700mA
		В	455	457.5	460	nm	I <sub>F</sub> =700mA
Dominant Wavelength Wld	Wld	G	520	522.5	525	nm	I <sub>F</sub> =700mA
		R	620	622.5	625	nm	I <sub>F</sub> =700mA
Color temperature	Тс	W	6000	7000	8000	К	I <sub>F</sub> =700mA
Reverse Current	IR				10	μA	V <sub>R</sub> =5V
Viewing Angle	201/2				120	deq	I <sub>F</sub> =700mA
Recommend Forward Current	IF(rec)	RGBW			700	mA	


#### Notes:


Measurement tolerance of forward voltage  $\pm 0.1V$ 




## **5.** Optical Character Curves




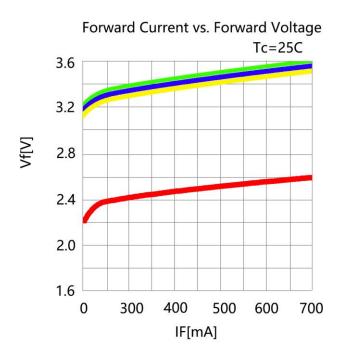

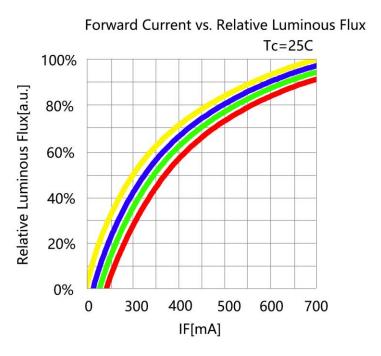




Case Temperature vs. Relative Luminous Flux






### 6. Spectrum Curves

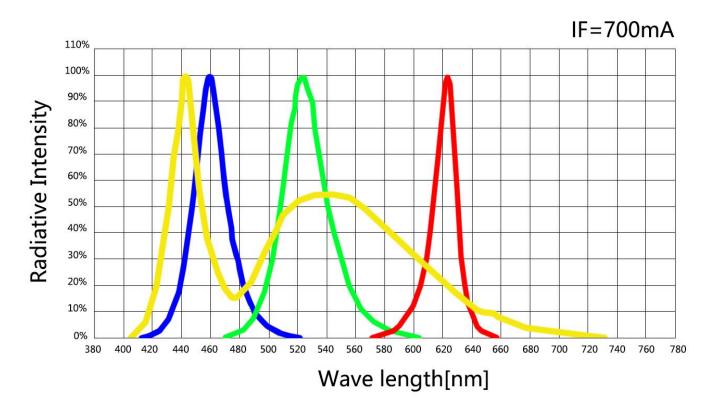

## 7. Viewing Angle Curves

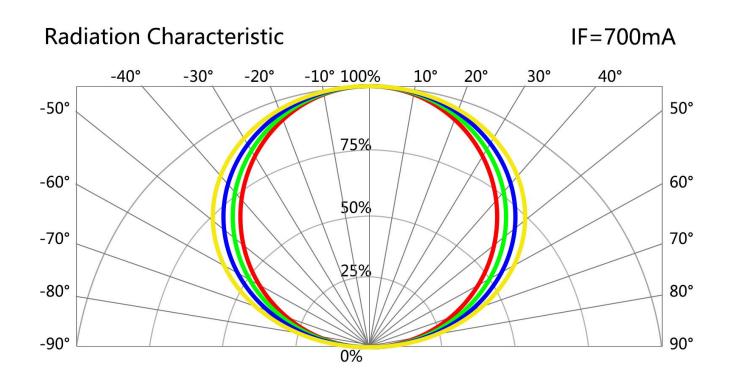


5/8



#### 8.Tape&Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at 25°C±3°C, humidity 50-60%. If unpacked above 1week, bake at 60±5°C for 10-12 hours before weld.

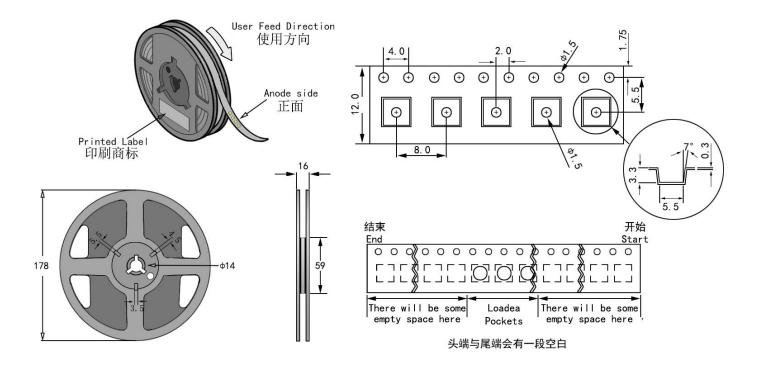


#### Notes:

- 1. QTY: 1000pcs/Reel
- 2. Tolerance ±0.2mm.
- 3. Package: P/N



#### **9.**Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

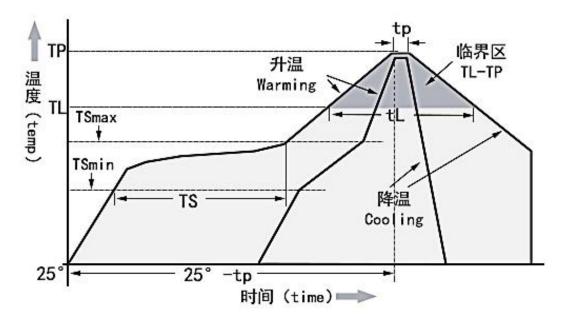

Temperature Curve Character	Lead-free solder			
Average heating rate(TSmin to Tp)	最高3℃/秒			
	Top 3 °C / s			
Preheating: Minimum temperature (TSmin)	90°C			
Preheating: Maximum temperature (TSmax)	200°C			
Preheating: Time (TSmin to TSmax)	60-180 s			
Duration above temperature: Temperature TL	240°C			
Duration above temperature: Time tL	60-150 s			
Peak/classification temperature (Tp)	260℃			
Time within 5°C of actual peak temperature (tp)	20-40 s			
	最高 6℃/秒			
Cooling speed	The highest 6 $^\circ\!C$ / s			
	最多8分钟			
Time to reach peak temperature at 25℃	8 minutes Max			



#### **10.**Cautions


#### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)

#### 2. Heat Dissipation

- A. It is recommend to configure reasonable heat dissipation device for the product.
- B. The best working temperature range of the product is 40-60°. It is recommended to control

the working temperature of the product within a reasonable range.

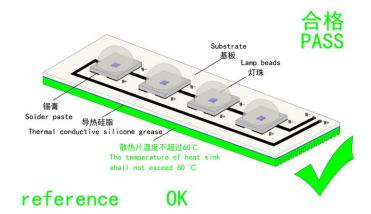

#### **3. Installation Conditions**

A、Do not exert any pressure on the LED area during the use of the led beads. If the machine is

used to take materials, select a suction nozzle of reasonable size, such as below:

